

HANDY-GROUT

**HG-9**



## BENEFITS

- Lightweight
- Durable design
- Portable

# HAND-OPERATED GROUT PUMP

The Airplaco Handy-Grout HG-9 is a hand-operated, portable grout pump for smaller grouting jobs, such as door frames, encasements, waterproofing, void fill and other grouting applications.

# HANDY-GROUT

## HG-9

### APPLICATIONS:

- Door Frames
- Encasement
- Waterproofing
- Piling Encasements
- Void Fill

The HG-9 is designed for durability while still offering a lightweight grouting solution. The HG-9 features cast assembly, ball-check manifold, polyurethane hopper and pressure gauge. The HG-9 portable grout pump design maximizes two important features, durability and weight. The HG-9 grout pump's cast assembly ensures a durable design free from excessive welding and the polyurethane hopper ensures lightweight and easy cleaning. An in-line pressure gauge allows the operator to monitor the efficiency in relation to the thickness of the slurry used for the application.


### HAND-OPERATED



### 5 GALLON HOPPER



### HOSE ASSEMBLY

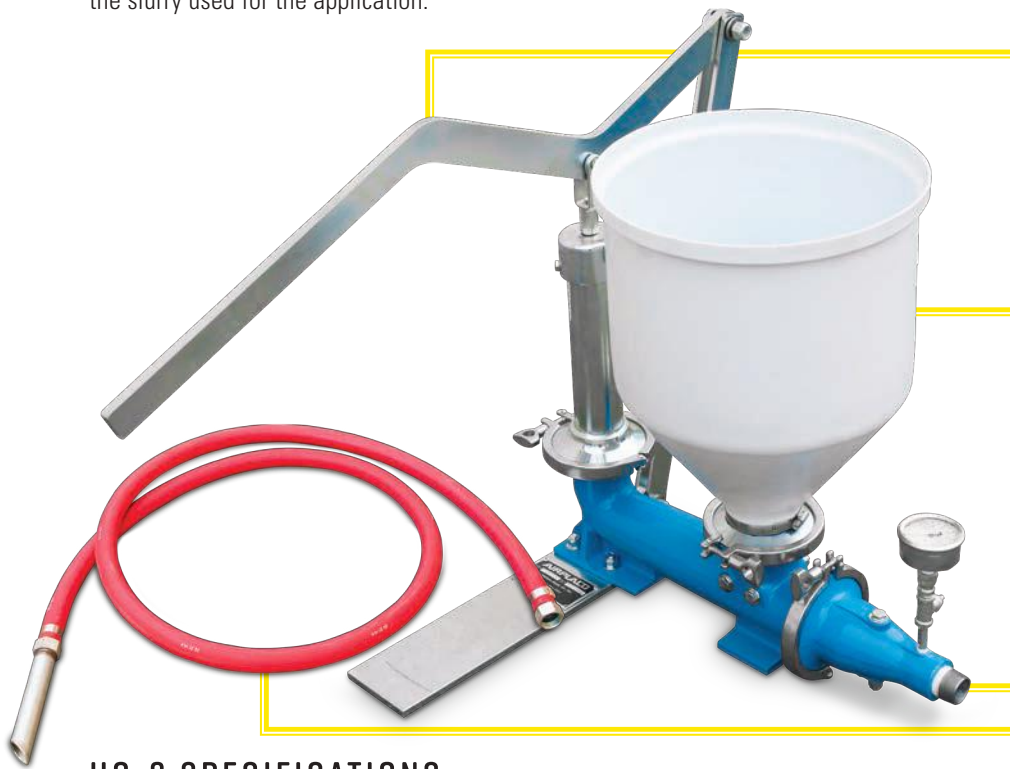

### HG-9 SPECIFICATIONS

Max Output	15 cu ft/hr (424 L)
Max Line Pressure	0 to 100 psi
Material Hopper	5 gallon (19 L)
Outlet Size	1 in.
Max Vertical	20 ft (6 m)
Max Horizontal	50 ft (15 m)
Power Source	Manual
Dimensions	16 x 24 x 26 in. (W x L x H)
Weight	53 lb (24 kg)

*Disclaimer: Maximum output distance and pressure cannot be reached simultaneously. Performance will vary depending on the operator, cycle rate, mix design, and placement line.*

**AIRPLACO**<sup>®</sup>  
AMERICAN OWNED. AMERICAN BUILT.